
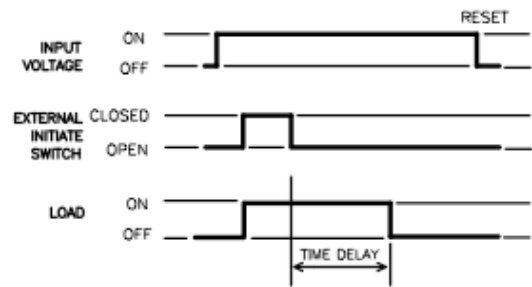


Delay Timer

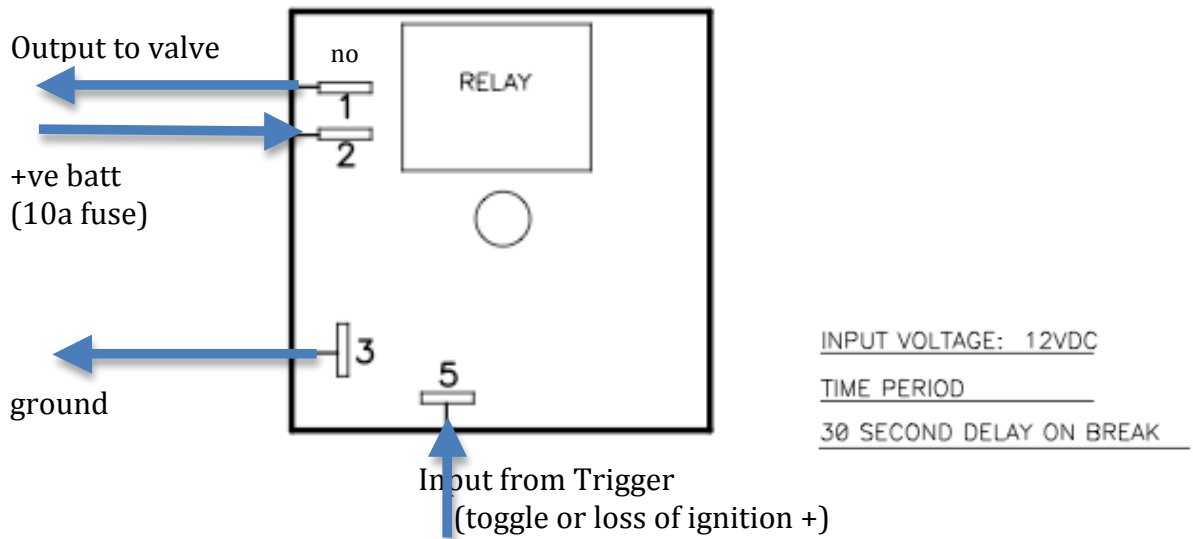

OPERATION:
 INPUT VOLTAGE IS APPLIED CONTINUOUSLY. UPON CLOSURE OF THE NORMALLY OPEN EXTERNAL INITIATE SWITCH, THE LOAD IS ENERGIZED, AND REMAINS ENERGIZED AS LONG AS IT IS CLOSED. WHEN THE EXTERNAL INITIATE SWITCH OPENS, THE TIME DELAY IS STARTED. AT THE END OF THE TIME DELAY, THE LOAD IS DE-ENERGIZED, AND THE TIMER IS READY FOR ANOTHER CYCLE.